

1. (M)- FAN MOTOR LOC 2. HEAVIEST SECTION 3. MPT DENOTES MALE FPT DENOTES FEMA BFW DENOTES BEVE GVD DENOTES GROOF FLG DENOTES FLAN PE DENOTES PLAIN 4. +UNIT WEIGHT DOES ACCESSORIES (SEE 5. MAKE-UP WATER PF 20 psi MIN [137 kPa],	CATION I IS UPPER SECTION E PIPE THREAD ALE PIPE THREAD ELED FOR WELDING OOVED NGE END S NOT INCLUDE	NIS	EVAPO	<i>.</i> 0, 1	NC.		SERIAL #	FACE C (2) ACCESS DOOR	D	^{ATE} 9/12/2025
BFW DENOTES BEVE GVD DENOTES GROUP FLG DENOTES FLAN PE DENOTES PLAIN 4. +UNIT WEIGHT DOES ACCESSORIES (SEE 5. MAKE-UP WATER PR	I IS UPPER SECTION E PIPE THREAD ALE PIPE THREAD FELED FOR WELDING OOVED NGE END S NOT INCLUDE							· <u></u> -		
FOR PRE-FABRICATI PIPING 7. 3/4" [19mm] DIA. MOU RECOMMENDED STE 8. DIMENSIONS LISTED ENGLISH F METRIC [mr	RESSURE 50 psi MAX [344 kPa] MENSIONS DO NOT L TION OF CONNECTINI UNTING HOLES. REF EEL SUPPORT DRAV D AS FOLLOWS: T-IN	SE G ER TO				FACE E PLAN VIEW		ACE A	FACE D	
		-			[178]	1'-3 1/4" [387]	" 			
<u> </u>	2/4" (4) 4* [100] BFW		5'-9 1/4" * [1759] * FLUID IN	_ 3'-3/8" * [924]	9'-1/8" [2748]	(4) 1/2* [1 FPT VEN		M) (M)		

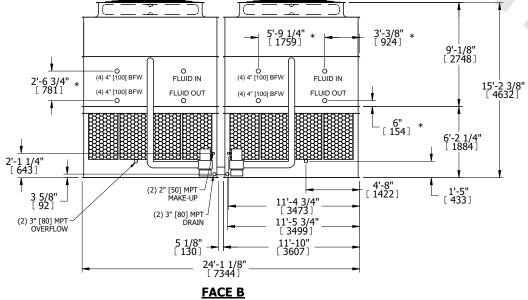



SHIPPING	33720 lbs+ [15300] kg-
WEIGHT	33720 lbs+ [13300] kg-