


ANCHOR HARDWARE TO BE ASTM A325 5/8" [16mm] BOLT OR EQUIVALENT.

PLACING SHIMS BETWEEN THE UNIT MOUNTING FLANGE AND THE SUPPORTING BEAM.

4. BEAMS MUST BE LOCATED UNDER THE FULL LENGTH OF THE PAN SECTION. 5. SUPPORTING BEAM SURFACE MUST BE LEVEL, DO NOT LEVEL THE UNIT BY

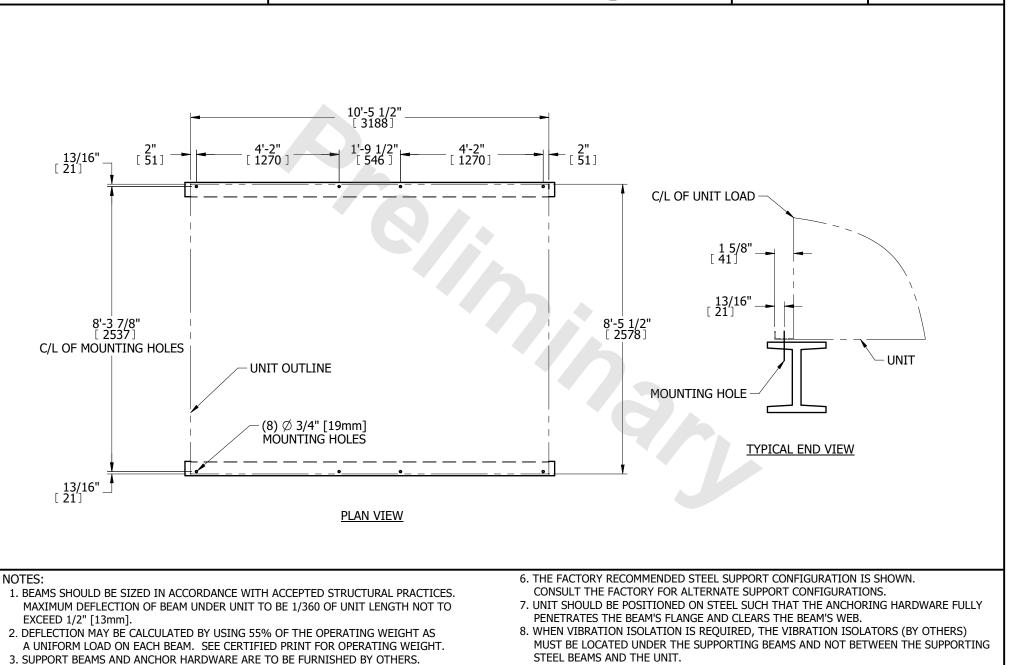

9. DIMENSIONS LISTED AS FOLLOWS: ENGLISH FT-IN [METRIC] [mm]

DWG. #

SCALE

N.T.S.

SLAW0911-DE

DRAWN BY

JLG