
ATWB 20-7I24-Z

UNIT

TITLE

STEEL SUPPORT CONFIGURATION

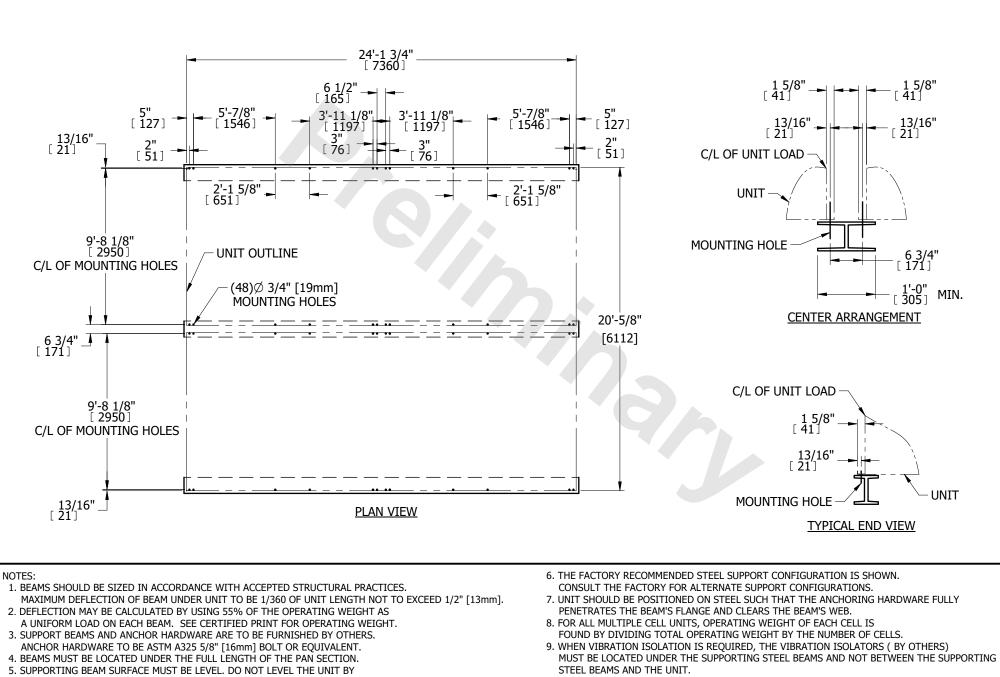

EVAPCO, INC.

PLACING SHIMS BETWEEN THE UNIT MOUNTING FLANGE AND THE SUPPORTING BEAM.

- 10.THE CENTER BEAM SHOULD HAVE A MINIMUM WIDTH OF 12" [305mm]
- 11. DIMENSIONS LISTED AS FOLLOWS: ENGLISH FT-IN

[METRIC] [mm]

DWG. #

SCALE

N.T.S.

SLAW6M24-DD

DRAWN BY

JLG